


Type	A	B	C	D	E	F	G	H	I	L	M1	M2	N	P
SPX40	702	412	2,5	430	110	630	490	538	73	84	120	30	450	*
SPX50	835	475	3	554	143	808	620	680	82	95	155	40	575	*
SPX65	1055	580	3	746	152	1030	680	740	103	137	185	50	650	*
SPX80	1253	700	4	876	182	1211	900	990	123	153	275	50	850	*
SPX100	1468	815	4	1042	199	1402	1050	1140	150	173	310	50	900	*

* Contact your representative

Net motor power (kW)

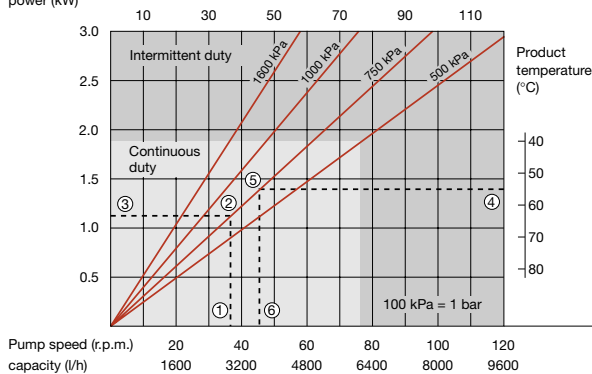

40


Hose Ø 40 mm

Minimum starting torque 320 Nm

Capacity per revolution 1,33 l.

Pump speed (r.p.m.) 20 40 60 80 100 120
capacity (l/h) 1600 3200 4800 6400 8000 9600

Net motor power (kW)

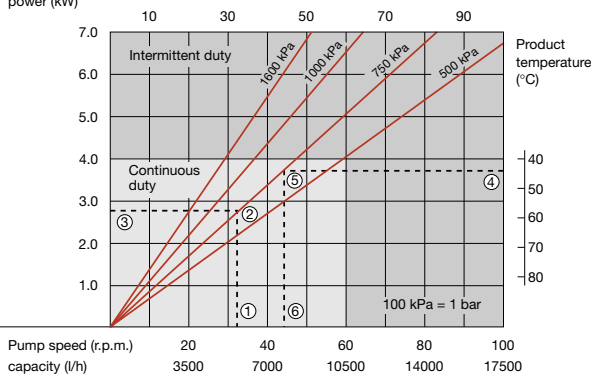

50


Hose Ø 50 mm

Minimum starting torque 620 Nm

Capacity per revolution 2,9 l.

Pump speed (r.p.m.) 20 40 60 80 100
capacity (l/h) 3500 7000 10500 14000 17500

Net motor power (kW)

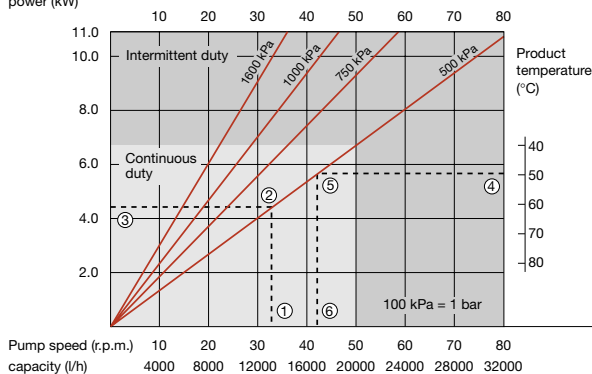

65


Hose Ø 65 mm

Minimum starting torque 1150 Nm

Capacity per revolution 6,7 l.

Pump speed (r.p.m.) 10 20 30 40 50 60 70 80
capacity (l/h) 4000 8000 12000 16000 20000 24000 28000 32000

Net motor power (kW)

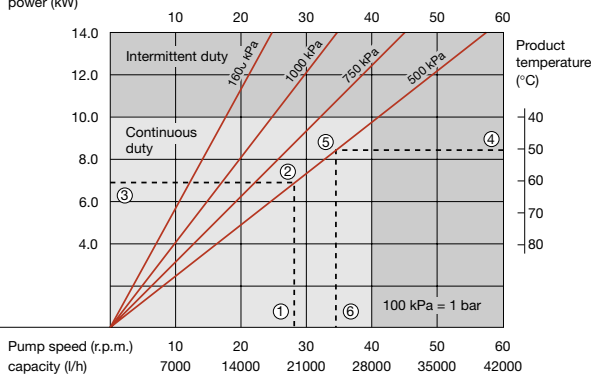

80


Hose Ø 80 mm

Minimum starting torque 2000 Nm

Capacity per revolution 11,7 l.

Pump speed (r.p.m.) 10 20 30 40 50 60
capacity (l/h) 7000 14000 21000 28000 35000 42000

Net motor power (kW)

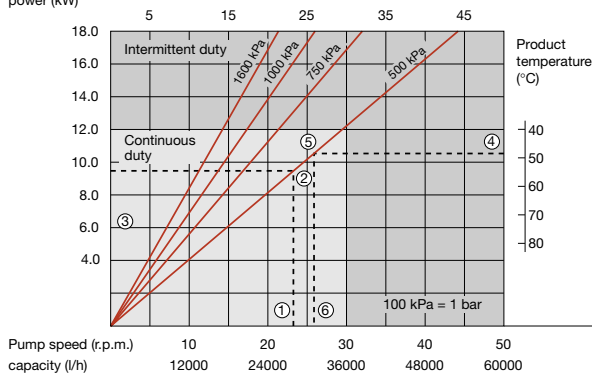

100

Hose Ø 100 mm

Minimum starting torque 3100 Nm

Capacity per revolution 20,0 l.

Pump speed (r.p.m.) 10 20 30 40 50
capacity (l/h) 12000 24000 36000 48000 60000

The information contained in this document is believed to be correct but Bredel Hose Pumps B.V. accepts no liability for any errors it contains, and reserves the right to alter specifications without notice. SPX and Bredel are registered trademarks. Bredel: worldwide supplier of industrial high pressure hose pumps.